



Installation Manual

Step-By-Step Guide

How to install

A. Installation

Step 1: Install handle - move cap to the side and drive the two screws into the openings. Now you will be able to tilt or open the window.



Handle, cap closed



Handle, cap open

Tip 1: Take sash out of window frame, it is lighter and easier to install. Remove caps on the side and take out the pin from top. Lift and take out sash.



Remove cap



Take out pin from top

Step 2: You can either use a timber frame between window frame and concrete or install the window directly on the concrete.

How to install

A. Installation

Step 3: When window frame is properly placed and leveled, drill 3 screws per side through the window frame (1st and 3rd screw: 6" from the top and bottom, second screw in the middle).



1st screw: 6" from top



3rd screw: 6" from bottom

Step 4: Seal window (see detailed window installation guide).

Step 5: Re-apply sash into the window frame and check sash level.


Tip 2: If the sash is not level, find adjustment screws and adjust until sash is leveled. Upper screw: up and down adjustments; Lower screw: left and right adjustments.



Adjustment screws,
hidden under cap



Adjustment screws,
cap removed

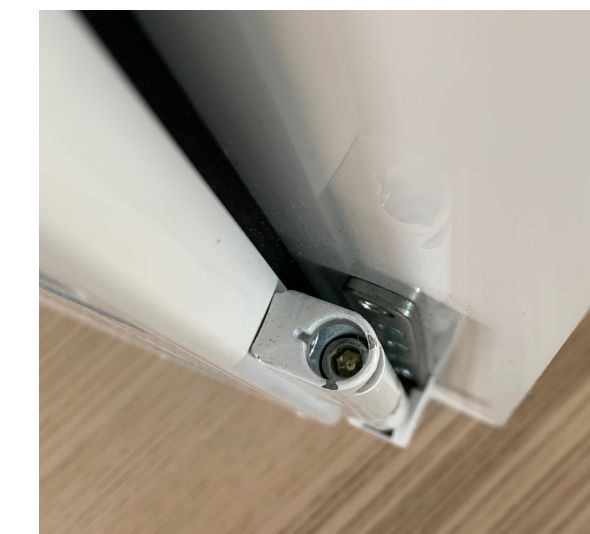

Adjustment screw
on top:
up and down



Adjustment screw
on bottom:
left and right